




# POLYLIFTE

## TECHNICAL PARTICULARS

# T14/16

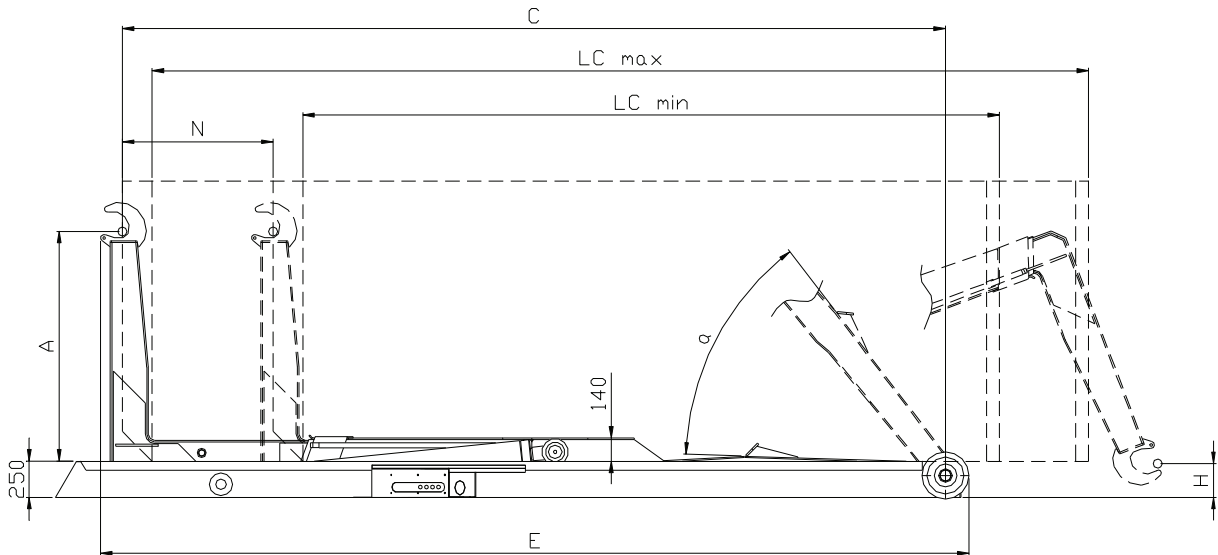

LIFTING CAPACITY	16 T							
HOOKLIFT WEIGHT	2000		2145		2290		2310	
TOTAL LENGTH (E)	4460	4660	4945	5145	5267	5467	5667	5867
HOOK-ROLLER CENTRE DISTANCE (C)	4200	4400	4700	4900	5000	5200	5400	5600
CONTAINER WORKING LENGTH (LC min)	3600		4100		4400		4600	
CONTAINER WORKING LENGTH (LC max)	4800	5000	5300	5500	5600	5800	6000	6200
HOOK HEIGHT (A)	1480							
CONTAINER PICKING UP HEIGHT (H)	-70		-30		-10		50	
HOOKARM STROKE (N)	825	1025	825	1025	825	1025	1025	1225
WIDTH OF THE FRAME	1060							
MAX TILTING ANGLE (α)	55°				51°			
LOADING ANGLE (max/min)*	52°/32°		46°/31°		41°/29°		42°/29°	
OPERATING PRESSURE (bar)	310				330			
PUMP DELIVERY / 1000 r (Lt / min)	60							
OIL TANK (Lt)	150							
CENTRE OF GRAVITY (Dimension referred to sliding roller centre)	2850	2890	2930	2970	2640	2680	2800	2840

\* truck height 900 mm.